hitron



Model # **CODA60**

Quick Install Guide

Cable Modem

Step 1: Set up the Cable Modem

A If you are replacing a Cable Modem that is currently connected in your home, unplug the old modem and remove it from its current location. Place this new cable modem in the same spot as the previous modem. Otherwise, place the cable modem near a coax and power outlet.

B Connect a coaxial cable (provided in the box) from the Cable Modem to a Coax Outlet on the wall. Make sure that the cable is tightly connected.

C Get the Power Adapter (External, 12V DC, 2.5A, made by MOSO, Model #MSA-C2500IS12.0-30I-US) and connect it from the Modem to a Power Outlet.

D Wait until the LED is Solid **White**. This may take up to 10 minutes.

If not, please check that the coax cables are tightly connected. If so, please call your Internet Service Provider. It is possible that your Internet service has not been activated.

LED Behavior

LED	Description
Green Steady	After the CODA60 is plugged into an electrical outlet and is receiving power, it is booting.
White/Green Alternating	The CODA60 is searching for a downstream frequency on the CABLE connection
White Blinking	The CODA60 is connecting to your Cable Provider's DOCSIS network to download the appropriate configuration information.
White Steady	The CODA60 is online.
White/Cyan Alternating	There is a software upgrade or downgrade in progress.
Red Blinking	The CODA60 is not receiving a DOCSIS signal.
Red Slow Blinking	The CODA60 is having a provisioning issue. Contact your ISP.
Red Steady	The CODA60 is experiencing a hardware failure.
Red Green Blue Cycling	After holding the Reset button for 3 seconds, it is time to release the Reset button to launch the Factory Reset process.

Step 2: Configure your Modem

Activate your new cable modem by following your instructions from your ISP. You will need the CM MAC address from the label as part of the activation process.




Step 3: Connect to Your Home Network

Connect the Orange Ethernet Cable into the Orange Ethernet Port on the back of the Cable Modem and the other end to the WAN Ethernet Port on your previously installed Router. If you do not have a router, connect the Ethernet cable to the Ethernet port on your computer.

Step 4: Test Connection

A Make sure that your computer, tablet or cell phone is turned ON and is connected to your Router or Cable Modem via WiFi or Ethernet cable.
Note: Please make sure you power cycle your Router BEFORE testing the connection.

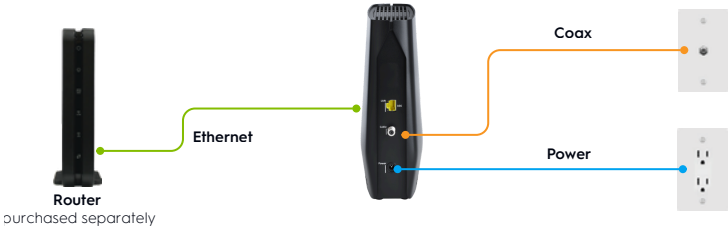

B Open a web browser. Your Cable Internet Service Provider may automatically redirect the browser to a special website. If not, please go to www.google.com to prove that your new cable modem is successfully set up.

Step 5: Register Your Product

us.hitrontech.com/product-registration/

Product Registration

Tech Support

Thank you for purchasing this Hitron Cable Modem. If you are having problems with your modem set up, please contact us.

You can visit **us.hitrontech.com/coda60** to get help, Frequently Asked Questions (FAQs) and user manuals. Click the Tech Support link above to see a list of Compatible Cable Internet Providers.

Tech Support

WARNING

Risk of electrical shock. Do not expose the device to water or moisture. The device is a high-performance communications device designed for home and office environments. Do not use the device outdoors. Keep the device in an environment between 0°C to 40°C (32°F to 104°F). To avoid overheating, do NOT place any objects on top of the device. Do not restrict the flow of air around the device. The manufacturer assumes no liability for damage caused by improper use of the device.

CAUTION

The cable distribution system should be grounded (earthed) in a accordance with ANS/NFPA 70, the National Electrical Code (NEC), in particular Section 820.93, Grounding of Outer Conductive Shield of a Coaxial Cable.

© Hitron Technologies Americas. The Hitron name and the Hitron logo are registered trademarks of Hitron Technologies in the US and other countries. Any non-Hitron trademarks are used for reference purposes only.